

PRE-STRETCH PALLET WRAPPER




FEATURES

- PLC control+key board control
- Inverter speed control
- Slow start and stop
- Stop at home position
- Auto detect pallet height
- Foldable tower design
- Front and rear forklift access
- Top sheet option
- Variable turntable and film carriage speed
- Middle reinforce
- Can store 5 recipes



Pre-stretch film carriage

DIMENSIONS

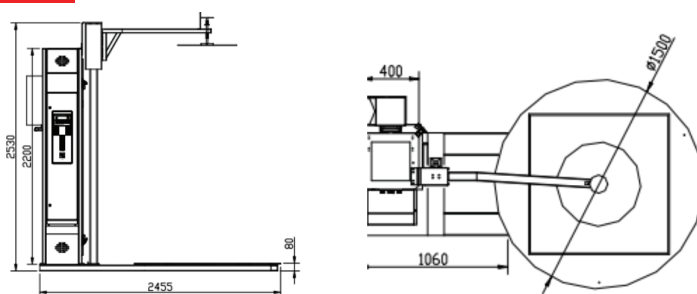

The Film System - The open-door film holder makes it more convenient to wear the film. The pre-stretching rate can reach 250%, saving material consumption. Maximize the value of stretched film per meter Standard constant release film Fixed-point winding and quantitative use of film.

Screen Control - Parameters can be adjusted from the control panel. Bottom pallet wrapping rounds from 1-10. Top pallet wrapping rounds from 1-10. Rotation speed adjustable from 3 to 10 rpm

Control System - PLC control system with more stable operation, heavy duty design with rigid machine body. Soft start and soft stop, safety device. After every wrapping work, turntable goes back to home position.

SPECIFICATION		CONTROL PANEL PARAMETER SETTING	
Model No	XT-4505-2	Bottom wrapping cycle	1-9 cycles
Description	Turntable pallet wrapper	Top wrapping cycle	1-9 cycles
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	Up and down cycle	1-9 cycles
Control System	PLC (Option: touch screen)	Reinforce cycle	1-9 cycles
Film Carriage	250% Pre-stretch film carriage	Photocell delay time	1-99 seconds
Turntable Speed	1-10 cycles/M	APPLICATION FILM SPECIFICATION	
Max Pallet Height	2100mm(Option: 2600/3000mm)		
Turntable diameter	1500mm (Option: 1650/1800/2000mm)	Film Type	Stretch film machine grade
Turntable height	80mm	Film Thickness	17-23mic
Turntable motor	750W	Film roll inner diamter	76mm
Pre-stretch motor	180W	Film roll outside diameter	250mm
Lifting Motor	180W	Film width	500mm
Max Pallet Weight	1500kg	Film roll weight	13.8kg
Power	1200W		
Machine Weight (NW)	435kg		
Machine Dimention (LxWxH)	2455 x 730 x 2200mm		